ROUTE	STATE	DISTRICT	SHEET NO.
92	MO	4	5

JOB NO. J4P1883

CONTRACT ID.

PROJECT NO.

COUNTY CLAY

STATE OF MISSOURI
RANDY L. JOHNSON
NUMBER PE-2003005437
PROFESSIONAL ENGINEER
THIS SHEET HAS BEEN SIGNED, SEALED AND DATED ELECTRONICALLY.

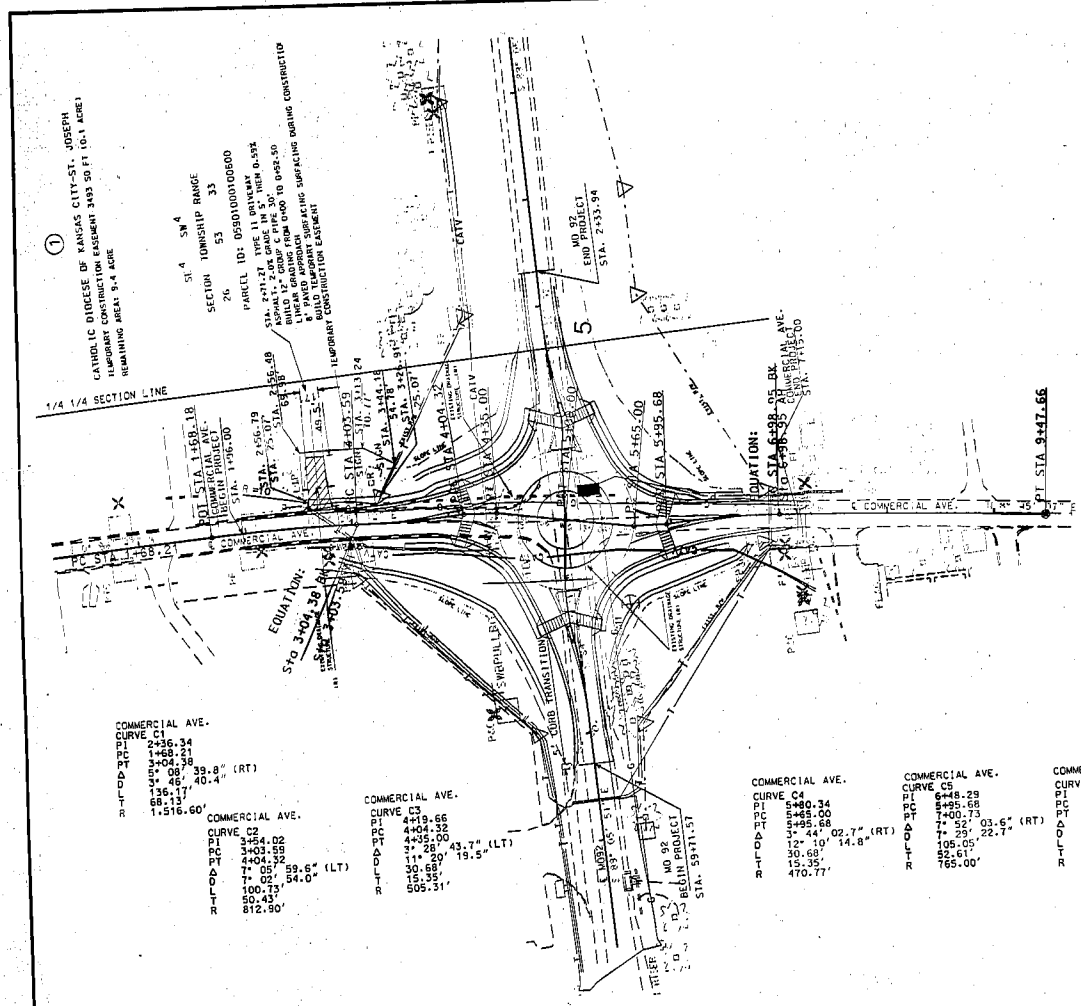

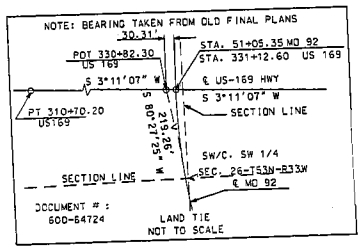

COMMERCIAL AVE.
CURVE C1
PI 2+36.34
PC 1+68.21
PT 3+04.38
Δ 5° 08' 39.8" (RT)
D 3° 46' 40.4"
L 136.17'
T 68.13'
R 1,516.60'

COMMERCIAL AVE.
CURVE C2
PI 3+64.02
PC 3+03.59
PT 4+04.32
Δ 7° 05' 59.6" (LT)
D 7° 02' 54.0"
L 100.73'
T 50.43'
R 812.90'

COMMERCIAL AVE.
CURVE C3
PI 4+19.66
PC 4+04.32
PT 4+35.00
Δ 3° 28' 43.7" (LT)
D 11° 20' 19.5"
L 30.68'
T 15.35'
R 505.31'

COMMERCIAL AVE.
CURVE C4
PI 5+80.34
PC 5+65.00
PT 5+95.68
Δ 3° 44' 02.7" (RT)
D 12° 10' 14.8"
L 30.68'
T 15.35'
R 470.77'

COMMERCIAL AVE.
CURVE C5
PI 6+48.29
PC 5+95.68
PT 7+00.73
Δ 7° 52' 03.6" (RT)
D 7° 29' 22.7"
L 105.05'
T 52.61'
R 765.00'

COMMERCIAL AVE.
CURVE C6
PI 8+23.31
PC 8+98.95
PT 9+47.66
Δ 1° 47' 54.7" (RT)
D 0° 43' 23.3"
L 248.71'
T 124.36'
R 7,923.15'

NOTE:
ALL EASEMENT STATION AND OFFSETS ARE FROM ℄ PROPOSED COMMERCIAL AVE.

ANY WORK INDICATED ON THE PLANS THAT EXTENDS BEYOND THE PROJECT LIMITS IS CONSIDERED INCIDENTAL TO AND A PART OF THE CONSTRUCTION OF THIS PROJECT.

NO DIRECT PAY FOR SAW CUTS

SEE SHEET 15 FOR STORM SEWER PLANS

SCALE
0 50 100 150

COMMERCIAL AVE. PLAN

IF A SEAL IS PRESENT ON THIS SHEET IT HAS BEEN ELECTRONICALLY SEALED AND DATED.

REV.

730 Series
7-17-09
Cm