MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
PLANS FOR PROPOSED
STATE HIGHWAY
CLAY COUNTY

ROUTE	STATE	DISTRICT
169	MO	4

JOB NO J4U1314C

CONTRACT ID

PROJECT NO

COUNTY CLAY

DESIGN DESIGNATION

A.D.T. - 2007 = 36,000

A.D.T. - 2027 = 58,990

D.H.V. = 2200 (NB)

T = 7%

V = 55 M.P.H.

FUNCTIONAL CLASSIFICATION = URBAN MINOR ARTERIAL

CONTRACTOR TO PERFORM ALL OPERATIONS WITHIN EXISTING R/W.

CONVENTIONAL SYMBOLS
(USED IN PLANS)

EXISTING / NEW

BUILDINGS AND STRUCTURES
GUARD RAIL
CONCRETE RIGHT-OF-WAY MARKER
STEEL RIGHT-OF-WAY MARKER
LOCATION SURVEY MARKER
UTILITIES
FIBER OPTICS
OVERHEAD TELEPHONE
UNDERGROUND TELEPHONE
OVERHEAD POWER
UNDERGROUND POWER
GAS
WATER
MANHOLE
FIRE HYDRANT
WATER VALVE
WATER METER
DROP INLET
DITCH BLOCK
GROUND MOUNTED SIGN
LIGHT POLE
H-FRAME POWER POLE
TELEPHONE PEDESTAL
FENCE
CHAIN LINK
WOVEN WIRE
GATE POST
BENCHMARK

NOTE: DASHED OR OPEN SYMBOLS INDICATE EXISTING FEATURES

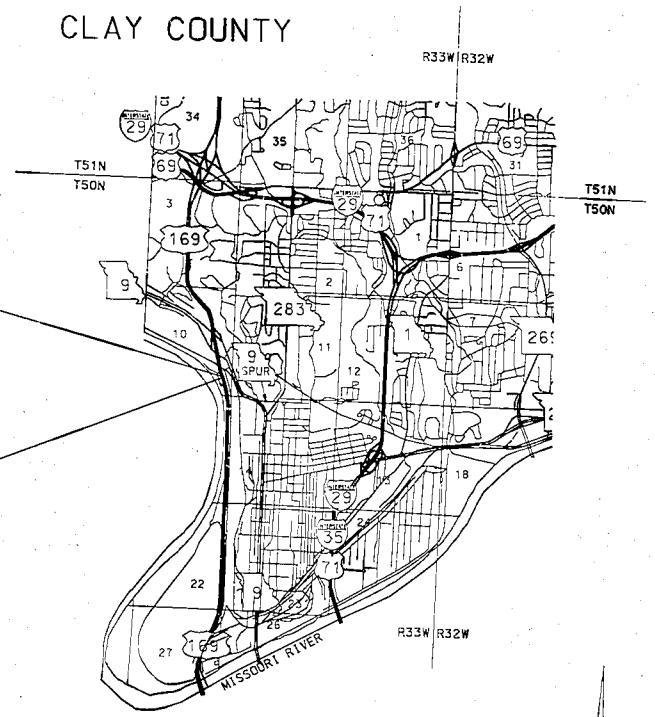

UNDERGROUND FACILITIES, STRUCTURES AND UTILITIES HAVE BEEN PLOTTED FROM AVAILABLE SURVEY AND RECORDS. THE COMMISSION DOES NOT WARRANT THE LOCATIONS OF THESE FACILITIES AS PRECISE. IT IS POSSIBLE THERE MAY BE OTHERS, THE EXISTENCE OF WHICH IS PRESENTLY NOT KNOWN OR SHOWN. IT IS THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE THE EXISTENCE AND PRECISE LOCATION OF ALL FACILITIES AND TO AVOID DAMAGE. SEE THE JOB SPECIAL PROVISIONS FOR A LIST OF UTILITY COMPANIES ON OR WITHIN THE VICINITY OF THE PROJECT LIMITS.

ENGINEER'S AUTHENTICATION
THE RESPONSIBILITY FOR PROFESSIONAL ENGINEERING LIABILITY ON THIS PROJECT IS HEREBY LIMITED TO THIS SET OF PLANS AUTHENTICATED BY THE SEAL, SIGNATURE, AND DATE HEREUNDER ATTACHED. RESPONSIBILITY IS DISCLAIMED FOR ALL OTHER ENGINEERING PLANS INVOLVED IN THIS PROJECT AND SPECIFICALLY EXCLUDES REVISIONS AFTER THIS DATE UNLESS REAUTHENTICATED.
HDR ENGINEERING, INC.

730 Series
6/2/08 KDM

HDR
HDR Engineering, P.C.

INDEX OF SHEETS

DESCRIPTION	SHEET NUMBER
TITLE SHEET	1
TYPICAL SECTIONS (1 SHEET)	2
SUMMARY (1 SHEET)	2-A
SUMMARY (2 SHEETS)	2-B
PLAN-PROFILE	3
REFERENCE POINTS	4
COORDINATE POINTS	5
SPECIAL SHEETS	6-7
TRAFFIC CONTROL SHEETS	8
EROSION CONTROL	-
LIGHTING	-
SIGNALS	-
SIGNING	-
PAVEMENT MARKING	9
CULVERT SECTIONS	-
A7615	1-8
CROSS SECTIONS	-
COMPUTER DATA	-

LENGTH OF PROJECT

BEGINNING OF PROJECT STA. 174+57.80
END OF PROJECT STA. 175+04.50

APPARENT LENGTH 46.70 FEET

EQUATIONS AND EXCEPTIONS

TOTAL CORRECTIONS 0.00 FEET
NET LENGTH OF PROJECT 46.70 FEET

STATE LENGTH 0.009 MILES

DATE 8-21-07

Contract I.D. 070828-401

TITLE01_R_J4U1314C.dgn 4:35:55 PM 8/21/2007

REV.