MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
PLANS FOR PROPOSED
STATE HIGHWAY
CLAY COUNTY

ROUTE	STATE	DISTRICT	SHEET NO.
92	MO	4	1

JOB NO. J4P1116B

CONTRACT ID.

PROJECT NO.

COUNTY CLAY

STATE OF MISSOURI — MARK C. FISHER — NUMBER PE-27171 — PROFESSIONAL ENGINEER — THIS SHEET HAS BEEN SIGNED, SEALED AND DATED ELECTRONICALLY.

DESIGN DESIGNATION

A.A.D.T. - 2009 = 7,191
A.A.D.T. - 2029 = 10,561
D.H.V. = 10%
T = 6%
V = 60 M.P.H.

(PRINCIPAL ARTERIAL)

NORMAL RIGHT OF WAY WILL BE ACQUIRED FOR THIS PROJECT

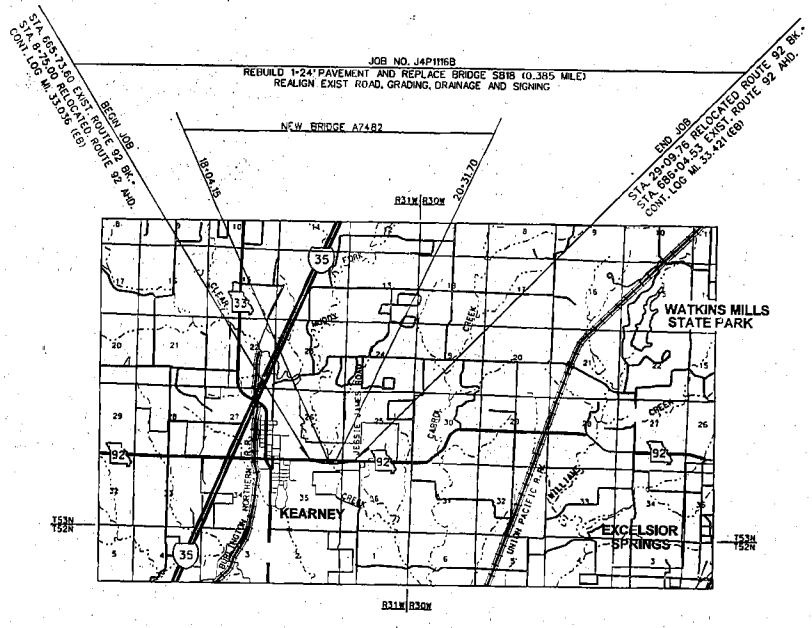

CONVENTIONAL SYMBOLS
(USED IN PLANS)

	EXISTING	NEW
BUILDINGS AND STRUCTURES		
GUARD RAIL		
CONCRETE RIGHT-OF-WAY MARKER		
STEEL RIGHT-OF-WAY MARKER		
LOCATION SURVEY MARKER		
UTILITIES		
FIBER OPTICS	-FO-	-FO-
OVERHEAD TELEPHONE	-O-	
UNDERGROUND TELEPHONE	-T-	-T-
OVERHEAD POWER	-O-	
UNDERGROUND POWER	-P-	-P-
GAS	-G-	-G-
WATER	-W-	-W-
MANHOLE	SEW	
FIRE HYDRANT		
WATER VALVE		
WATER METER		
DROP INLET		
DITCH BLOCK		
GROUND MOUNTED SIGN	SIGN	
LIGHT POLE		
H-FRAME POWER POLE		
TELEPHONE PEDESTAL	PED	
FENCE		
CHAIN LINK	-V-	
WOVEN WIRE	-X-	
GATE POST		
BENCHMARK	BM	

NOTE: DASHED OR OPEN SYMBOLS INDICATE EXISTING FEATURES

INDEX OF SHEETS

DESCRIPTION	SHEET NUMBER
TITLE SHEET	1
TYPICAL SECTIONS (TS) (3 SHEETS)	2
QUANTITIES (QU) (6 SHEETS)	3
PLAN-PROFILE (PP)	4-8
RIGHT OF WAY (RW)	9-12
REFERENCE POINTS (RP)	13
COORDINATE POINTS (CP)	14
SPECIAL SHEETS (SS)	15-16
TRAFFIC CONTROL SHEETS (TC)	17-26
EROSION CONTROL SHEETS (EC)	27-28
LIGHTING (LT)	XX-XX
SIGNALS (SG)	XX-XX
SIGNING (SN)	29-32
PAVEMENT MARKING (PM)	33-34
CULVERT SECTIONS (CS)	35
BRIDGE DRAWINGS (B)	
A7482	1-36
CROSS SECTIONS (XS) (57 SHEETS)	1-23 1-33 1-1

LENGTH OF PROJECT

BEGINNING OF PROJECT	STA. 8+75.00
END OF PROJECT	STA. 29+09.76
APPARENT LENGTH	2034.76 FEET
EQUATIONS AND EXCEPTIONS:	NONE
TOTAL CORRECTIONS	0.00 FEET
NET LENGTH OF PROJECT	2034.76 FEET
STATE LENGTH	0.385 MILES
FEDERAL LENGTH	0.385 MILES

IF A SEAL IS PRESENT ON THIS SHEET IT HAS BEEN ELECTRONICALLY SEALED AND DATED.

CONTRACT ID 080919-404

REV.

730 Series
7-17-09
Cm